




Standard Kabelbinder

Material: Polyamid 6,6, halogenfrei
Temperaturbereich: -40 °C bis +85 °C
Minimale Installationstemperatur: -10 °C
Zulassungen: UL94 V-2, RoHS-konform
Verpackungseinheit: 100 Stück

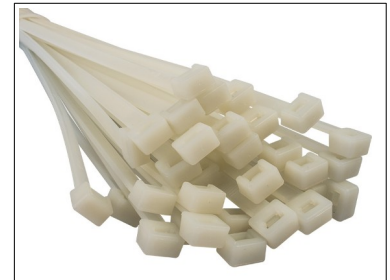

Artikelnr.	Breite (mm)	Länge (mm)	Zugkraft (kg)	max, Bündeldurch- messer (mm)	min, Bündeldurch- messer (mm)
501100	1,8	100	4,9	21	0,2
501150	1,9	150	5	32	0,2
502065	2,2	60	5,1	11	0,2
502080	2,2	80	5,1	14	0,2
502199	2,2	200	5,1	52	0,2
502060	2,5	60	6,1	11	1,0
502100	2,5	98	8,2	21	1,0
502135	2,5	135	8,1	32	1,0
502160	2,6	160	8,2	40	1,0
502200	2,6	200	8,2	52	1,0
502260	2,6	260	8,2	71	1,0
502380	2,6	380	8,2	105	1,0
502300	2,9	300	8,9	82	1,0
503100	3,6	100	18	21	2,0
503140	3,6	140	18	35	2,0
503200	3,6	200	18	50	2,0
503250	3,6	250	18	68	2,0
503295	3,6	290	18	80	2,0
503370	3,6	370	18	103	2,0
503401	3,6	400	18	105	2,0
504120	4,8	120	23	24	2,5
504178	4,8	178	23	45	2,5
504190	4,8	190	23	48	2,5
504200	4,8	200	23	50	2,5
504250	4,8	250	23	68	2,5
504300	4,8	290	23	79	2,5
504370	4,8	360	23	98	2,5



Kabelbinder – natur

Artikelnr.	Breite (mm)	Länge (mm)	Zugkraft (kg)	max, Bündeldurch- messer (mm)	min, Bündeldurch- messer (mm)
504450	4,8	430	23	115	2,5
504500	4,8	500	23	145	2,5
504550	4,8	550	23	158	2,5
504610	4,8	610	23	180	2,5
504920	4,8	920	23	271	2,5
505350	5,5	350	28	90	5,0
505500	5,5	500	28	145	5,0
506270	6	270	32	79	2,5
506350	6,5	350	32	90	2,5
506451	6,5	450	32	130	5,0
506150	6,8	150	45	38	4,0
508750	7,5	750	55	220	5,0
507200	7,8	200	55	45	5,0
507240	7,8	250	55	63	5,0
507300	7,8	300	55	82	5,0
507368	7,8	365	55	100	5,0
508450	7,8	430	55	130	5,0
508550	7,8	540	55	158	5,0
508610	7,8	610	55	180	5,0
509200	9	200	70	50	5,0
509300	9	300	77	82	5,0
509450	9	430	77	130	5,0
509610	9	610	77	180	5,0
509780	9	780	77	233	5,5
509785	9	910	77	250	5,0
509790	9	1020	77	307	5,0
509798	9	1220	77	363	5,0
509800	9	1350	77	400	5,0
509823	12,6	230	110	68	5,0
509830	12,6	290	110	82	5,0
509853	12,6	530	110	155	5,0
509860	12,6	650	110	192	5,0
509880	12,6	720	110	213	5,0
509900	12,6	1000	110	302	5,0